

GRAS 43AC-S6

Hi-Res Ear Simulator Kit LEMO



Freq range: 100 Hz to 50 kHz
Dyn range: 44 dB(A) to 166 dB
Sensitivity: 1.6 mV/Pa
Use: For general acoustic diagnostics

The GRAS 43AC-S6 Ear Simulator Kit is a complete test-jig for hi-res measurements up to 50 kHz on earphones coupled to the ear by inserts such as tubes and earmoulds.

The GRAS 43AC-S6 Ear Simulator Kit is a complete test jig for acoustically testing earphones coupled to the ear via inserts such as tubes and ear moulds. It is compatible with the following international requirements:

- IEC 60318-4: Occluded-ear simulator for the measurement of earphones coupled to the ear by ear inserts.

43AC-S6 uses the RA0403 Hi-Res Ear Simulator which extends the useful frequency range to 50 kHz. Read more about the RA0403 [here](#).

The 43AC comprises:

- [GRAS RA0403](#) Externally Polarized Hi-Res Ear Simulator
- [GRAS 40BP](#) 1/4" Pressure Microphone (included in RA0403)
- GRAS 26AC 1/4" Preamplifier
- [GRAS RA0001](#) Right-angled Adapter
- [GRAS RA0052 Test Jig](#)

The Test Jig has an adjustable spring-loaded arm to exert a variable force on the test object.

A prepolarized version is available, [GRAS 43AC-S7](#).

| | | |
|--|-----------------|------------------------|
| Theoretical dynamic range lower limit with GRAS preamplifier | dB(A) | 44 |
| Theoretical dynamic range upper limit with GRAS preamplifier @ +120 V / ±60 V power supply | dB | 169 |
| Set sensitivity @ 250 Hz (±3 dB) | mV/Pa | 1.6 |
| Coupler volume | mm ³ | 1260 @ 500 Hz |
| Resonance frequency | kHz | 13.5 |
| Temperature range, operation | °C / °F | -30 to 60 / -22 to 140 |
| Temperature coefficient @250 Hz | dB/°C / dB/°F | -0.01 / -0.006 |
| Humidity range non condensing | % RH | 0 to 75 |
| ANSI standard | | S3.7 |
| IEC standard | | 60318-4 (former 60711) |
| CE/RoHS compliant/WEEE registered | | Yes/Yes/Yes |
| Connector type | | 3 m 7-pin LEMO |
| Weight | g / oz | 1550 / 54.675 |

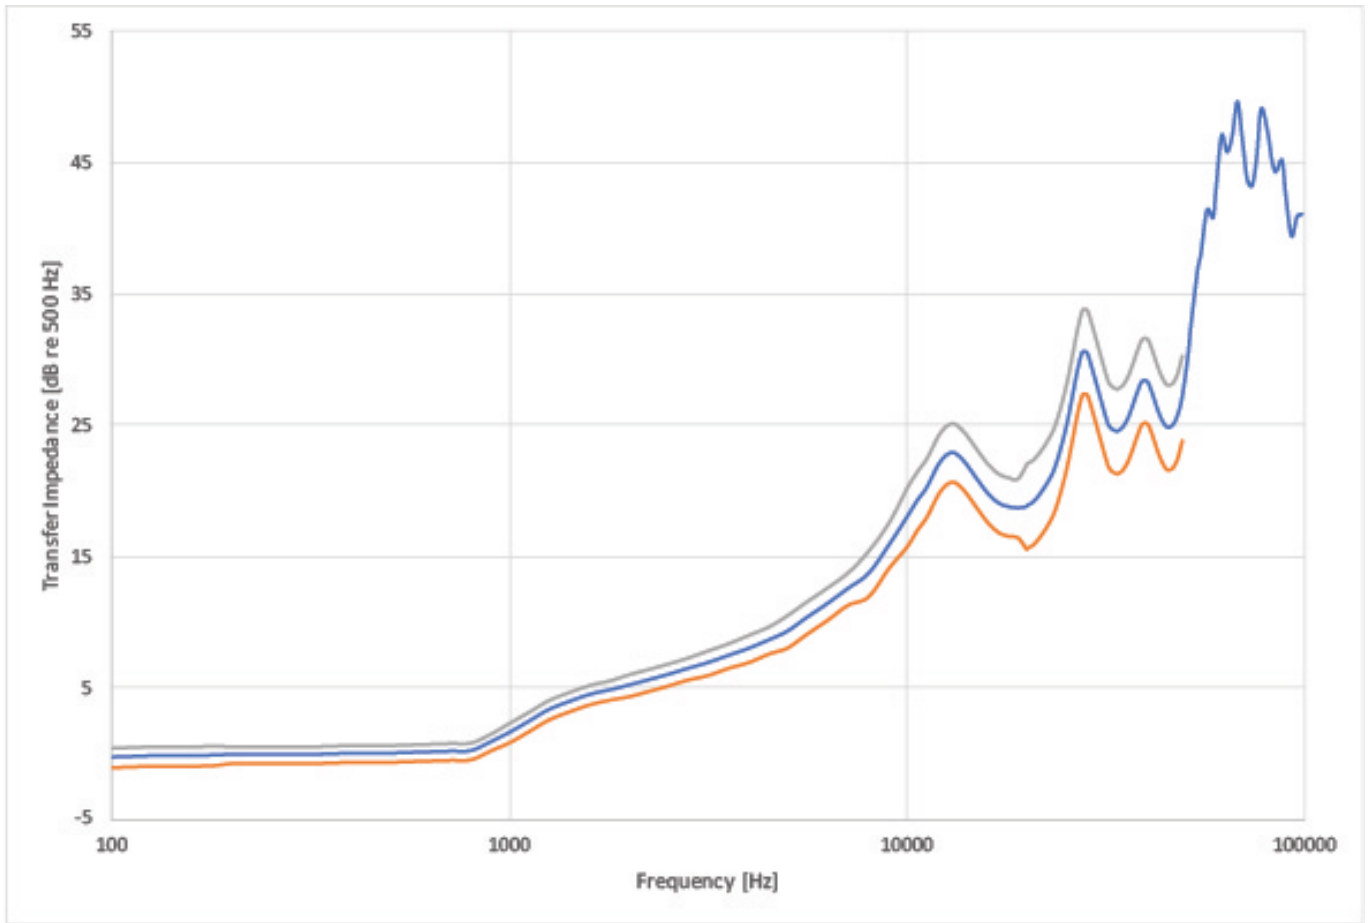


Fig 1. The transfer impedance of a typical RA0403 Hi-Res Ear Simulator with tolerances. Up to 10 kHz, the response is within the limits defined by IEC 60318-4. Above 10 kHz, the response is within a fairly tight tolerance band up to 50 kHz

Included

| | |
|-----------------------------|--|
| GRAS RA0403 | Hi-Res Ear Simulator, (ext. polarized) |
| GRAS 26AC | ¼" Preampfier |
| GRAS RA0001 | Right Angled Adapter |
| GRAS RA0052 | Test Jig |
| GRAS GR0435 | In-ear Adapter |
| GRAS GR0436 | Tube stud |
| GRAS GR0437 | Ear-mould Simulator |
| GRAS GR0438 | Union nut |
| GRAS GR0440 | Tube stud |
| GRAS GR0433 | Calibration Adapter |
| GRAS GR0434 | Stop Washer |
| GRAS MI0070 | Cord 0.2 m |

Optional

| | |
|---------------------------|--------------|
| GRAS 12AK | Power Module |
| GRAS 42AA | Pistonphone |

Miscellaneous

| | |
|-----------------------------|-----------------------------------|
| GRAS RA0196 | High-tension springs (set of two) |
|-----------------------------|-----------------------------------|

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

GRAS Worldwide

Subsidiaries and distributors in more
than 40 countries

HEAD OFFICE, DENMARK
GRAS SOUND & VIBRATION
Skovlytoften 33
2840 Holte
Denmark
Tel: +45 4566 4046
www.gras.dk
gras@gras.dk

USA
GRAS SOUND & VIBRATION
5750 S.W. Arctic Drive
Beaverton, OR 97005
Tel: 503-627-0832
Toll Free: 800-231-7350
www.gras.us
sales@gras.us

CHINA
GRAS SOUND & VIBRATION
Room 303, Building T6
Hongqiaohui, 990, Shenchang Road
Minhang District, Shanghai
China, 201106
Tel: +86 21 64203370
www.gras.com.cn
cnsales@gras.dk



ABOUT GRAS SOUND & VIBRATION

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones to industries where acoustic measuring accuracy and repeatability is of utmost importance in R&D, QA and production. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, and consumer electronics. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect and trust.

GRAS Sound
& Vibration